

# Stretch bar Display 46.6 inch




SKU:

EAN:

## FEATUES

- Support real-time management and release on mobile, iPad and PC.
- Support remote upgrade of advertising player software version and OTA upgrade.
- Support the advertising machines in the same group can be played synchronously and the synchronization interval is less than 500ms .
- Support the mobile phone to remotely set the properties of the advertising player, control the volume, rotation angle, time zone, turn off and turn on the advertising player .
- Support remote monitoring of the network status, system status and hardware status of the advertising player, and monitor the content of the advertising player.
- Support the needs of multiple forms of rolling subtitles and bullet screens, the font, size and content of subtitles and bullet screens can be edited.
- Scheduling supports multiple priority levels, and supports shim/normal/interrupt/emergency message priority.
- Scheduling supports multiple recurring modes, recurring by day/week/month.
- It can support multiple media such as video/picture/marquee/subtitle/RSS/component/ppt/pdf.
- Support self-built template mobile phone one-key call to modify at any time.

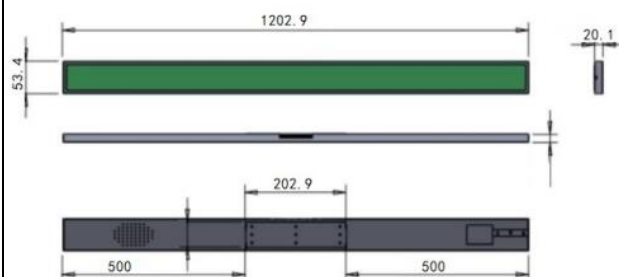

## SPECIFICATION

Product Dimension	1202.9*53.4*20.1mm
Panel	46.6inch
Resolution	3840*120
Screen scale/Display area	1183.68*36.99mm
Display color	16.7M
Visual angle	H: 178° V: 178°
Brightness	400cd/m2
Screen Life(hrs)	> 50,000(hrs)
CPU	RK3568
Memory	2G DDR3
Storage	32G EMMC
OSD language	Multilingual
System	Android11.0

WiFi	2.4G/5G WIFI
	802.11b : DQPSK, DBPSK, CCK
	802.11g/n : 64-QAM,16-QAM, , QPSK, BPSK
Bluetooth	N/A
Ethernet	N/A
Interface	TF Card×1/OTG×1/Type-c×1
Video	Support MPEG-1, MPEG-2, MPEG-4, H.263, H.264, RV, etc. (max support 1080P)
Audio	Support MP4, WMA, AAC and so on
Picture	JPEG, PNG, BMP and so on
The input voltage	AC100-240v 50/60HZ
Standby power	≤1W, support low power standby mode
Maximum power consumption	35W
Material	Metal
storage temperature	-20--60°
Color	Black Normally
Installation	Wall mounted bracket
Adapter	AC 12V/5A
Warranty card	One
Qualification certificate	One
User's Manual	One
Screws	One