
SKU: EAN:



## **FEATUES**

- Support real-time management and release on mobile, iPad and PC.
- Support remote upgrade of advertising player software version and OTA upgrade.
- Support the advertising machines in the same group can be played synchronously and the synchronization interval is less than 500ms.
- Support the mobile phone to remotely set the properties of the advertising player, control the volume, rotation angle, time zone, turn off and turn on the advertising player.
- Support remote monitoring of the network status, system status and hardware status of the advertising player, and monitor the content of the advertising player.
- Support the needs of multiple forms of rolling subtitles and bullet screens, the font, size and content of subtitles and bullet screens can be edited.
- Scheduling supports multiple priority levels, and supports shim/normal/interrupt/emergency message priority.
- Scheduling supports multiple recurring modes, recurring by day/week/month.
- It can support multiple media such as video/picture/marquee/subtitle/RSS/component/ppt/pdf.
- Support self-built template mobile phone one-key call to modify at any time.

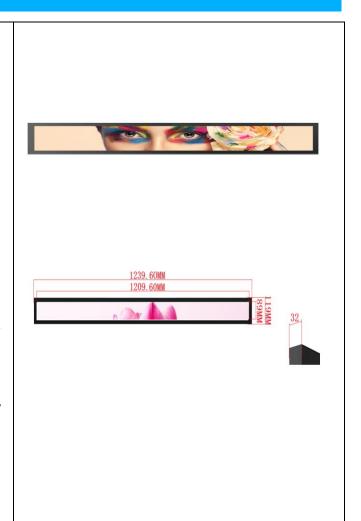

## **SPECIFICATION**

| Product Dimension         | 1239.6*119*32mm |
|---------------------------|-----------------|
| Panel                     | 47.7inch        |
| Resolution                | 3840*282        |
| Screen scale/Display area | 1209.6*89mm     |
| Display color             | 16.7M           |
| Visual angle              | H: 178° V: 178° |
| Brightness                | 400cd/m2        |
| Screen Life(hrs)          | > 50,000(hrs)   |
| CPU                       | RK3568          |
| Memory                    | 2G DDR3         |
| Storage                   | 32G EMMC        |
| OSD language              | Multilingual    |
| System                    | Android11.0     |

2.4G/5G WIFI

WiFi 802.11b: DQPSK, DBPSK, CCK

802.11g/n : 64-QAM,16-QAM, , QPSK, BPSK

| Bluetooth                 | N/A  |
|---------------------------|--|
| Ethernet                  | N/A  |
| Interface                 | TF Card×1/OTG×1/Type-c×1   |
| Video                     | Support MPEG-1, MPEG-2, MPEG-4, H.263, H.264, RV, etc. (max support 1080P) |
| Audio                     | Support MP4, WMA, AAC and so on  |
| Picture                   | JPEG, PNG, BMP and so on   |
| The input voltage         | AC100-240v 50/60HZ   |
| Standby power             | ≤1W, support low power standby mode  |
| Maximum power consumption | 35W  |
| Material                  | Metal  |
| storage temperature       | -2060°   |
| Color                     | Black Normally   |
| Installation              | Wall mounted bracket   |
| Adapter                   | AC 12V/5A  |
| Warranty card             | One  |
| Qualification certificate | One  |
| User's Manual             | One  |
| Screws                    | One  |